



精密水準器系列產品

平行精密水準器



- *高品質的鑄鐵材質,全方位的表面測量
- *所有的等級皆可用木盒包裝

Code#	Size	Sensitivity (Per 1m)	Parallelness and Squareness	Net weight (kg)
542-1002	100	0.02mm/ 4sec	0.01	1.3
542-1502	150	0.02mm/ 4sec	0.01	1.3
542-1505	150	0.05mm/10sec	0.01	1.3
542-1501	150	0.1 mm/20sec	0.01	1.3
542-2002	200	0.02mm/ 4sec	0.01	1.7
542-2005	200	0.05mm/10sec	0.01	1.7
542-2001	200	0.1 mm/20sec	0.01	1.7
542-2502	250	0.02mm/ 4sec	0.01	2.3
542-2505	250	0.05mm/10sec	0.01	2.3
542-2501	250	0.1 mm/20sec	0.01	2.3
542-3002	300	0.02mm/ 4sec	0.01	2.8
542-3005	300	0.05mm/10sec	0.01	2.8
542-3001	300	0.1 mm/20sec	0.01	2.8
542-4502	450	0.02mm/ 4sec	0.01	4.5
542-4505	450	0.05mm/10sec	0.01	4.5
542-4501	450	0.1 mm/20sec	0.01	4.5
542-6002	600	0.02mm/ 4sec	0.01	6.0
542-6005	600	0.05mm/10sec	0.01	6.0
542-6001	600	0.1 mm/20sec	0.01	6.0



角型精密水準器



*高品質的鑄鐵材質,全方位的表面測量

*所有的等級皆可用木盒包裝


Unit = mm

Code#	Size	Sensitivity (Per 1m)	Parallelness and Squareness	Net weight (kg)
541-1002	100	0.02mm/ 4sec	0.01	1.0
541-1005	100	0.05mm/10sec	0.01	1.0
541-1001	100	0.1 mm/20sec	0.01	1.0
541-1502	150	0.02mm/ 4sec	0.01	2.1
541-1505	150	0.05mm/10sec	0.01	2.1
541-1501	150	0.1 mm/20sec	0.01	2.1
541-2002	200	0.02mm/ 4sec	0.01	3.8
541-2005	200	0.05mm/10sec	0.01	3.8
541-2001	200	0.1 mm/20sec	0.01	3.8
541-2502	250	0.02mm/ 4sec	0.01	5.8
541-2505	250	0.05mm/10sec	0.01	5.8
541-2501	250	0.1 mm/20sec	0.01	5.8
541-3002	300	0.02mm/ 4sec	0.01	7.5
541-3005	300	0.05mm/10sec	0.01	7.5
541-3001	300	0.1 mm/20sec	0.01	7.5



精密水準器系列產品

附磁角型精密水準器

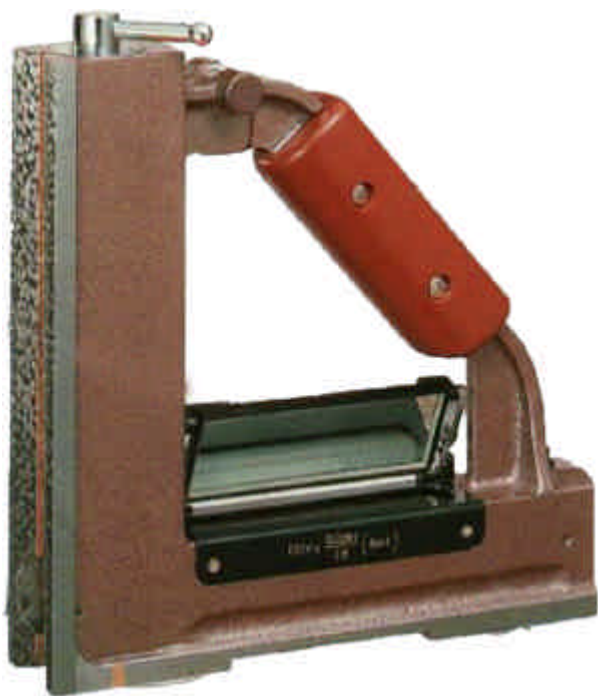

- *角型及垂直的設計可避免困難的角度測量
- *特製的鑄鐵材質，可以長期使用且適應季節及預防變形
- *適用於200mm到250mm的鏡面等級
- *磁性表面是使用和平面一樣的圓鑄塊
- *零點是可調整的校準螺絲

Unit = mm

Code#	Size	Sensitivity (Per 1m)	Mirror	Net weight (kg)
583-1502	150	0.02mm/ 4sec	無	2.2
583-1505	150	0.05mm/10sec	無	2.2
583-1501	150	0.1 mm/20sec	無	2.2
583-2002	200	0.02mm/ 4sec	有	3.2
583-2005	200	0.05mm/10sec	有	3.2
583-2001	200	0.1 mm/20sec	有	3.2
583-2502	250	0.02mm/ 4sec	有	4.9
583-2505	250	0.05mm/10sec	有	4.9
583-2501	250	0.1 mm/20sec	有	4.9